

SLIM LINE



Bravo 100
Bravo 125
Bravo 150



Bravo
Chrome



Bravo
Platinum

■ Use

- Exhaust air fan

■ Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

■ Options

Pull-cord switch

Pull-cord switch

Timer

Timer

- Time delay range from 2 to 30 min

Humidity sensor

Humidity

- Humidity level range from 60 to 90%
- Time delay range from 2 to 30 min

Motion sensor


Motion sensor

- Reach distance 1 to 4 m
- Sensor viewing angle up to 100°
- Time delay range from 2 to 30 min


■ Features

- Wall and ceiling mounting
- Easy maintenance
- Long continuous work
- Back valve
- Ball bearing motor
- Decoration – Bravo Chrome, Bravo Platinum
- 5 years guarantee

| Type | Pull-cord switch | Timer | Humidity sensor | Motion sensor |
|-----------|------------------|-------|-----------------|---------------|
| Bravo 100 | | | | |
| 100 S | ● | | | |
| 100 T | | ● | | |
| 100 ST | ● | ● | | |
| 100 H | | ● | ● | |
| 100 SH | ● | ● | ● | |
| 100 IR | | ● | | ○ |
| Bravo 125 | | | | |
| 125 S | ● | | | |
| 125 T | | ● | | |
| 125 ST | ● | ● | | |
| 125 H | | ● | ● | |
| 125 SH | ● | ● | ● | |
| 125 IR | | ● | | ○ |
| Bravo 150 | | | | |
| 150 S | ● | | | |
| 150 T | | ● | | |
| 150 ST | ● | ● | | |
| 150 H | | ● | ● | |
| 150 SH | ● | ● | ● | |
| 150 IR | | ● | | ○ |

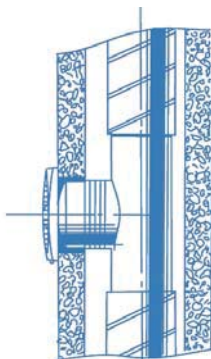


Overall and mounting dimensions

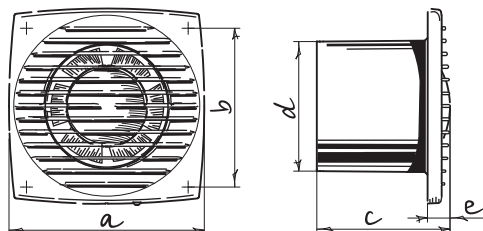

| Type | Dimensions [mm] | | | | |
|-----------|-----------------|-----|-----|-----|----|
| | a | b | c | d | e |
| Bravo 100 | 150 | 122 | 102 | 100 | 17 |
| Bravo 125 | 176 | 144 | 104 | 125 | 17 |
| Bravo 150 | 205 | 174 | 124 | 150 | 19 |

Technical data

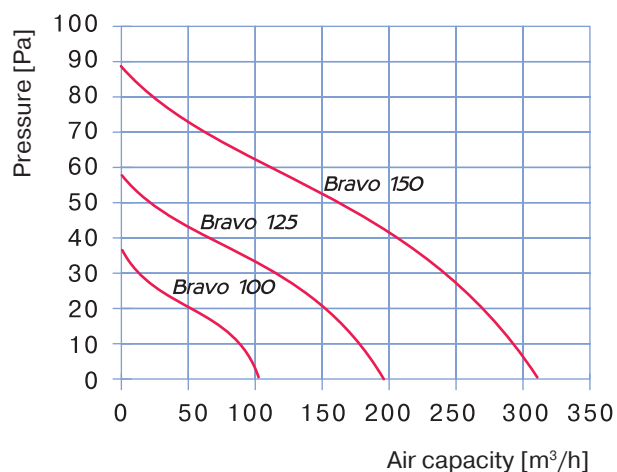

| Parameters | Bravo 100 | Bravo 125 | Bravo 150 |
|--------------------------|-----------|-----------|-----------|
| Voltage [V] | 220-240 | 220-240 | 220-240 |
| Power [W] | 14 | 16 | 24 |
| Air capacity [m³/h] | 101 | 192 | 305 |
| Noise level [dB(A) 3m] | 35 | 37 | 39 |
| RPM [min ⁻¹] | 2300 | 2400 | 2400 |



Packing

