

## "QUATRO" DESIGN



Quatro 100  
Quatro 125  
Quatro 150



Quatro  
Platinum



Quatro  
Hi-tech



Quatro  
Hi-tech Chrome



Quatro  
Hi-tech Gold

### ■ Use

- Exhaust air fan

### ■ Application

- Residential premises
- Flats, cottages
- Offices
- Utility spaces
- Trade premises
- Restaurants
- Job sites
- Health care facilities
- Child care facilities

### ■ Options

*Pull-cord switch*

Pull-cord switch

*Timer*

Timer

- Time delay range from 2 to 30 min

*Humidity sensor*



Humidity

- Humidity level range from 60 to 90%
- Time delay range from 2 to 30 min


### ■ Features

- Wall and ceiling mounting
- Easy maintenance
- Long continuous work
- Back valve
- Ball bearing motor
- Decoration – metallic (Quatro Platinum), aluminum (Quatro Hi-Tech), chrome (Quatro Chrome), gold (Quatro Gold)
- 5 years guarantee

Type	Pull-cord switch	Timer	Humidity sensor
Quatro 100			
100 S	●		
100 T		●	
100 ST	●	●	
100 H		●	●
100 SH	●	●	●
Quatro 125			
125 S	●		
125 T		●	
125 ST	●	●	
125 H		●	●
125 SH	●	●	●
Quatro 150			
150 S	●		
150 T		●	
150 ST	●	●	
150 H		●	●
150 SH	●	●	●

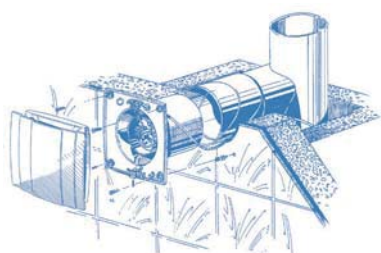


## Overall and mounting dimensions

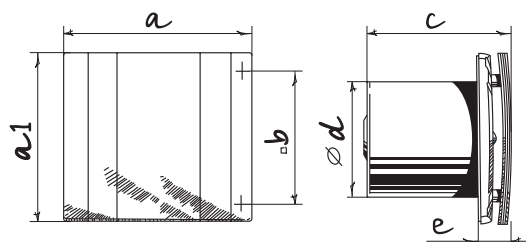

Type	Dimensions [mm]					
	a	a1	b	c	d	e
Quatro 100	171	151	108	128	100	32
Quatro 125	201	178	113	136	125	35
Quatro 150	236	207	165	157	150	38

## Technical data

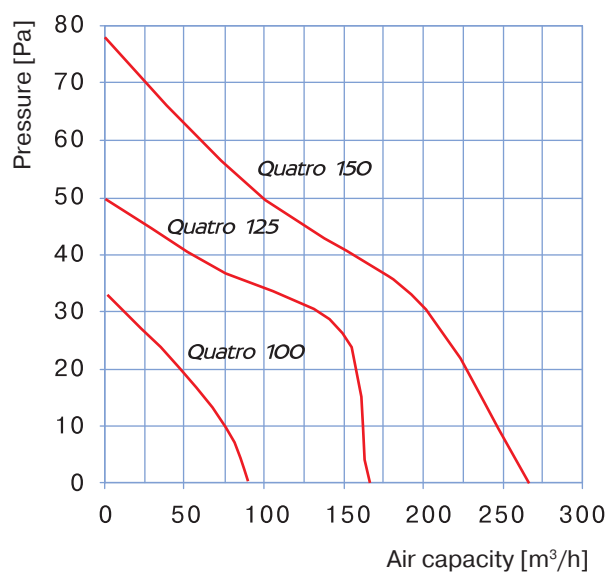

Parameters	Quatro 100	Quatro 125	Quatro 150
Voltage [V]	220-240	220-240	220-240
Power [W]	14	16	24
Air capacity [m³/h]	88	167	265
Noise level [dB(A) 3m]	33	34	37
RPM [min <sup>-1</sup> ]	2300	2400	2400



## Packing

