


E120P/125/IS/500 Roof fan



Usage: Insulated roof fan for ventilation. Inner pipe is made of galvanized steel and has a lip seal. A VILPE® pass-through according to the roofing material is required separately.

Dimensions: Duct size Ø 125 mm, external Ø 160 mm, height above roof approx. 500 mm.

Contents: Roof fan, screws, installation, operating and maintenance instructions. The P-series roof fans and exhaust ventilation pipes can be led watertightly with a pass-through set through a roof. VILPE® pass-through sets can be installed on any roofs with the most common pitches (less than 50 degrees). The pass-through set is always selected according to the roofing material of the roof. All the roof fans and exhaust ventilation pipes in the P-series are compatible with all pass-through set types. Using P-series XL roof fans and XL exhaust ventilation pipes requires an XL pass-through.

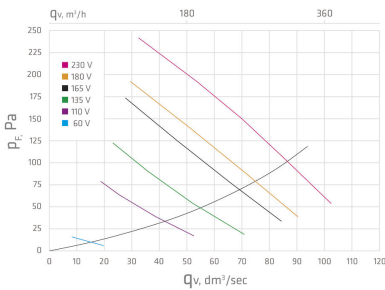


Color	Brown
EAN Code	6417323734941
Product code	73494
Color Code RR	RR32
Delivery	Stock
Gross weight	5.5500
Net Weight	4.5692

Duct size	125
Materials	expanded polystyrene, galvanized sheet steel , polypropene plastic (PP)
Package includes	cowl, fixing screws
Capacitor	1,5 µF
Current	0,23 A
Fan Type	AC
Power	52 W
Rotation Speed	2350 rpm
Voltage	230V/50Hz

E120P/125/IS/500 Roof fan



		E120					
		60 V	110 V	135 V	165 V	180 V	230 V
q V1	dm ³ /s	8.5	38.8	52.0	65.7	71.6	85.2
p tF	Pa	16	38	53	75	85	104
PE	W	9	27.0	37.7	51.0	57.3	82.7
ηtE	-	0.015	0.054	0.073	0.097	0.106	0.107
n	1/min	643	1237	1552	1901	2044	2355
L W63	dB	47.6	54.9	57.4	60.8	61.9	65.4
L W125	dB	53.9	67.2	71.2	73.1	73.4	76.0
L W250	dB	52.0	64.4	70.3	72.9	73.2	75.0
L W500	dB	38.6	52.8	57.6	61.5	62.8	67.2
L W1000	dB	32.6	52.4	56.3	60.9	62.2	66.9
L W2000	dB	15.3	45.3	53.6	58.3	59.6	62.3
L W4000	dB	*	28.2	37.1	46.5	49.4	55.7
L W8000	dB	*	*	21.1	31.8	34.7	40.5
L W	dB	56.7	69.4	74.1	76.5	76.9	79.4
L WA	dB (A)	44.8	59.0	64.0	67.4	68.3	71.7

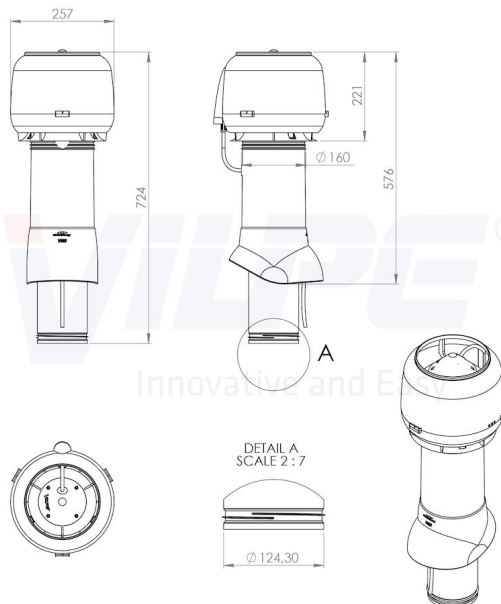

Copyright © 2014 SK Tuote Oy. All rights reserved.


VILPE.COM

SK Tuote Oy
Kauppatie 9, FI-65610 Mustasaari
Telephone +358 20 123 3200

Sales & Technical Support | FI +358 20 123 3233 | EN +358 20 123 3222 | RU +358 20 123 3290 | SE +46 70 511 2020 | PL +48 71 740 2623
myynti@sktuote.fi | sales@sktuote.fi

Page: 2
08.06.2017

E120P/125/IS/500 Roof fan

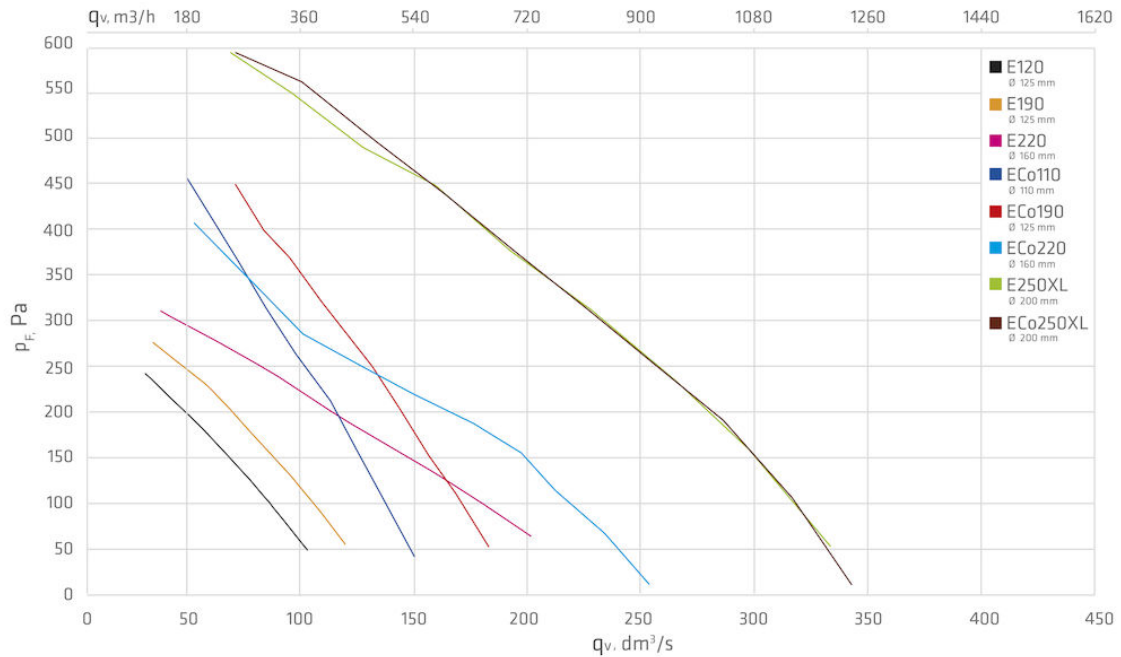

VILPE.COM

SK Tuote Oy
Kauppatie 9, FI-65610 Mustasaari
Telephone +358 20 123 3200

Sales & Technical Support | FI +358 20 123 3233 | EN +358 20 123 3222 | RU +358 20 123 3290 | SE +46 70 511 2020 | PL +48 71 740 2623
myynti@sktuote.fi | sales@sktuote.fi

Page: 3
08.06.2017

E120P/125/IS/500 Roof fan



VILPE[®]
Innovative and Easy

INSTALLER

Register the roof fan for an extended 5 year guarantee!

ASENTAJA

Rekisteröi huippumurille pidennetty 5 v. takuu!

INSTALLATÖR

Registrera takfläkten för en förlängd 5 års garanti!



VILPE app
VILPE-sovellus
VILPE-appen

VILPE.COM

REMOVE LABEL BEFORE INSTALLATION
POISTA TARRA ENNEN ASENNUSTA
TA BORT ETIKETTEN INNAN MONTERING

VILPE.COM

SK Tuote Oy
Kauppatie 9, FI-65610 Mustasaari
Telephone +358 20 123 3200

Sales & Technical Support | FI +358 20 123 3233 | EN +358 20 123 3222 | RU +358 20 123 3290 | SE +46 70 511 2020 | PL +48 71 740 2623
myynti@sktuote.fi | sales@sktuote.fi

Page: 4
08.06.2017